


S. 12-400

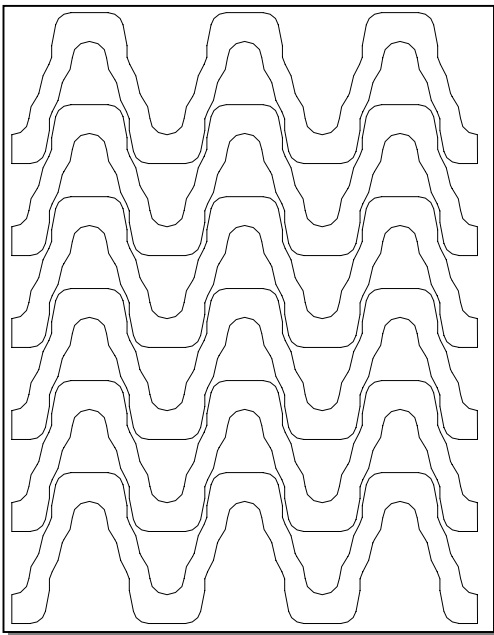


(1:1)

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	450	3.7
Polypropylene (PP)	590	3.7
Polyacetal (POM)	740	5.5


Belt surface: Open belt with a smooth surface.
Open area: 40%. Biggest opening 6 x 8 mm.
Strength: Ideal choice for light transportation.
Material/colour: PE/nat, PP/white and grey. POM/blue
Cleanability: Excellent. FSIS
Accessories:
Application: Cooling belt for small nose bar.
Width interval: 10 mm. e.g.: 100 mm, 110 mm, 120 mm etc

Sprocket data			
No. of teeth Z	A= Outside diameter mm	B= Pitch diameter mm	C= Inside diameter mm
10	50	42	33
19	84	76	67
24	104	96	87
28	120	112	103

Hub specifications				
Hub width 16 mm	10Z	19Z	24Z	28Z
Round Bore mm.	ø20	ø20 ø25 ø30 ø40	ø20 ø25 ø30 ø40	ø20 ø25 ø30 ø40
Square Bore mm.		25x25 40x40	25x25 40x40	25x25 40x40

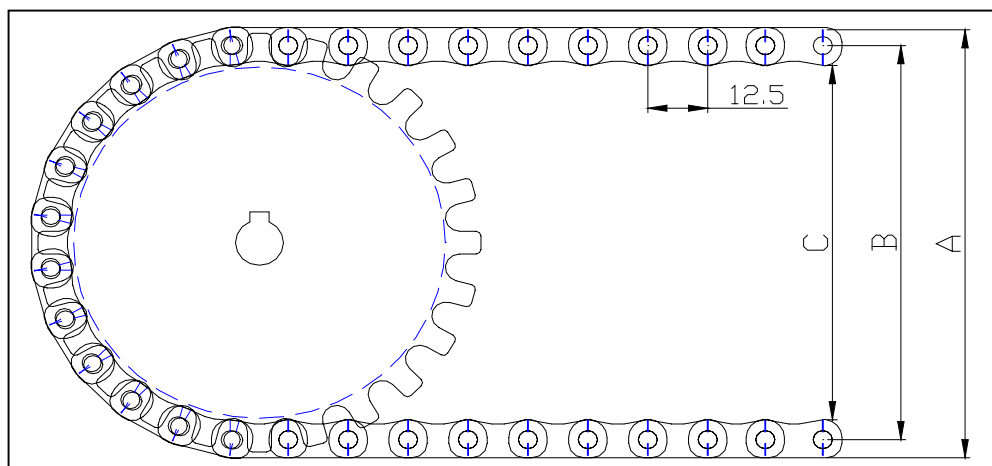

S. 12-406

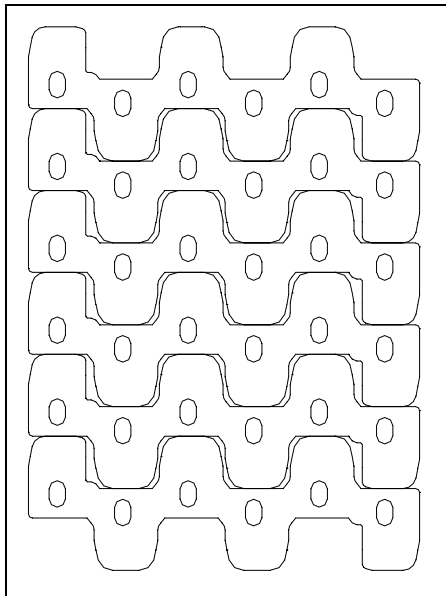

(1:1)


Belt data		
Materials	Max. Belt pull kg/m width	Belt weight kg/m ²
Polyethylene (PE)	450	4.6
Polypropylene (PP)	590	4.6
Polyacetal (POM)	740	6.5

Belt surface: Perforated flat top.
Open area: 8%. Biggest opening 4 x 2,5 mm.
Strength: Ideal choice for light transportation.
Material/colour: PE/nat, PP/white and grey. POM/blue
Cleanability: Excellent. FSIS
Accessories:
Application: Seafood, dairy, vegetables, poultry, snacks, sweet goods and other industries that handle products requiring drainage and small openings.


Width interval: 10 mm. e.g.: 100 mm, 110 mm, 120 mm etc

Sprocket data			
No. of teeth Z	A=Outside diameter mm	B= Pitch-diameter mm	C=Inside diameter mm
10	50	42	33
19	84	76	67
24	104	96	87
28	120	112	103

Hub specifications				
Hub width 16 mm	No. Of teeth			
	10Z	19Z	24Z	28Z
Round bore mm.	ø20	ø20 ø25 ø30 ø40	ø20 ø25 ø30 ø40	ø20 ø25 ø30 ø40
Square bore mm.		25x25 40x40	25x25 40x40	25x25 40x40

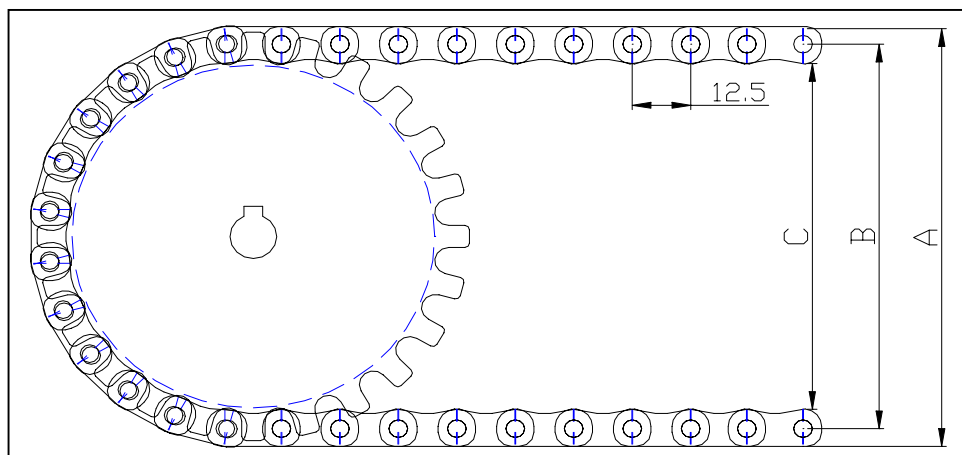

S. 12-408

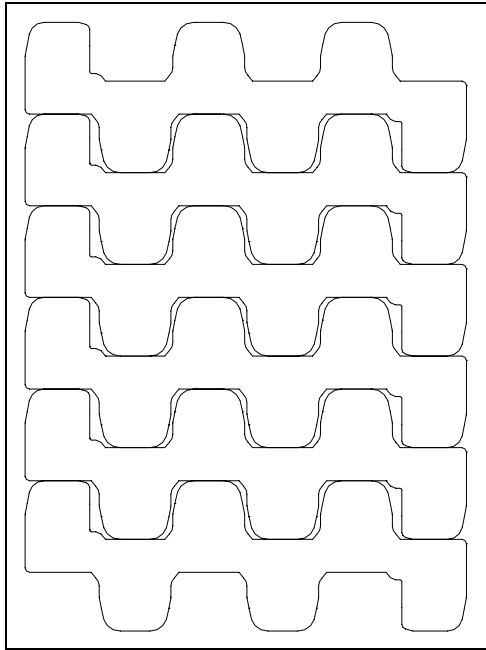

(1:1)

Belt data		
Materials	Max. Belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	450	4.6
Polypropylene (PP)	590	4.6
Polyacetal (POM)	740	6.5

Belt surface: Flat top.
 Open area: Closed.
 Strength: Ideal choice for light transportation.
 Material/colour: PE/nat, PP/white and grey. POM/blue
 Cleanability: Excellent. FSIS
 Accessories:
 Application: Red meat, vegetables, seafood, fruit, snacks and bakeries.
 Width interval: 10 mm. e.g.: 100 mm, 110 mm, 120 mm etc

Sprocket data			
No. of teeth Z	A= Outside diameter mm	B= Pitch-diameter mm	C= Inside diameter mm
10	50	42	33
19	84	76	67
24	104	96	87
28	120	112	103

Hub specifications				
Hub width 16 mm	No. of teeth			
	10Z	19Z	24Z	28Z
Round bore mm.	ø20	ø20	ø20	ø20
		ø25	ø25	ø25
		ø30	ø30	ø30
		ø40	ø40	ø40
Square bore mm		25x25	25x25	25x25
		40x40	40x40	40x40

